ARC Latchsets Product Data

FOR PRODUCTS SHOWN ON PAGES 27-29.

Knob & Lever Latchset

- 2 3/8" (standard) and 2 3/4" backsets available.
- Supplied for 1 3/8" door thickness as standard. The minimum door thickness is 1 1/4"; the maximum door thickness is 2 1/2" (please specify).
- All lever latchsets meet ADA accessibility requirements.

Each set consists of solid brass knobs or levers, concealed screw finished roses, metal thru-bolting spring-assisted rose cassette, latch, strike, dust box, faceplate, spindle, all necessary mounting screws, installation template and instructions.



Latchsets with any of the smaller roses are available with a push-button privacy function just like the larger roses.

Tubular Latch Features

- 28° rotation to retract latch.
- Tough, non-rusting materials used throughout. Face covers and strikes are solid brass. No.013 "T" strike supplied as standard or No.014 "Full Lip" strike as an option. (Please specify.)
- Critical interior parts are made of solid brass.
- For over sixty years, OMNIA's latches have been opening and closing millions of doors all around the world.

Functions

- **PA – Passage:** Latch operates by knob or lever from either side of door.
- **PR – Privacy:** Push pin provided for privacy inside room. Emergency release hole for outside room. Emergency release key also provided.
- **SD – Single Dummy:** Trim on one side of door only. Concealed screw roses for surface mounting. Knob or lever with rose. For pair dummy, order two single dummies.

FINISH CODES



3 Polished Brass, Lacquered



3A Polished Brass, Unlacquered



4 Satin Brass, Lacquered



5 Antique Brass, Lacquered



10B Black, Oil-Rubbed Lacquered



14 Polished Nickel Plated, Lacquered



15 Satin Nickel Plated, Lacquered




26 Polished Chrome Plated

SMALL ROSES WILL NOT FIT 2 1/8" BORE.

ALL ROSES ARE CONCEALED SCREW MOUNTED.

Latchset Component List

A – Door Knob/Lever (2)
B – Set Screw (2)
C – Nylon Threaded Washer (2)
D – Finished Rose (2)
Ea – Metal Spring Assist Sub-Rose
Eb – Metal Spring Assist Sub-Rose
F – Spindle (Teardrop groove positioned towards set screw)
G – Tubular Latch
H – Privacy Locking Block Machine Screw
I – Privacy Locking Block Locking Stopper
J – Privacy Locking Block
K – Tubular Latch Faceplate
L – Tubular Latch Strike Plate
M – Tubular Latch Dust Box
N – Thru-Bolt Machine Screws With Locking Washer (2)
O – Washer Installation Tool
P – Privacy Locking Pin (Privacy ONLY)
Q – Emergency Release Key

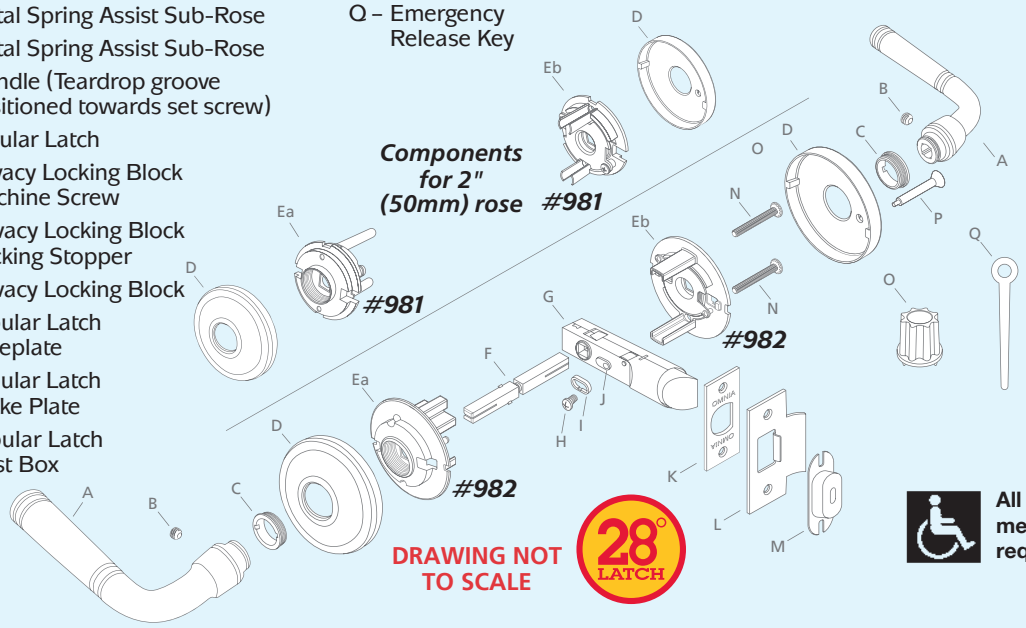

All OMNIA lever latchsets meet ADA accessibility requirements.

How to Order ARC

EXAMPLE: **PASSAGE/PRIVACY**

All sets shipped standard for 2 3/8" backset and 1 3/8" door thickness and T strike.

Design	Rose Option	Rose Size		Latch	Strike		Function	Finish
751	ML	50	/	238	F	.	PA	15
Lever or Knob Item#	*BD = Beaded ED = Edged ML = Milled*	*50 = 50 mm 67 = 67 mm*		*238 = 2 3/8" Backset 234 = 2 3/4" Backset 0 = Single Dummy*	*T = "T" Strike F = Full Lip Strike*		*See Function Codes (Above)*	*See Finish Codes (Above)*

Product order number would be 751ML50/238F.PA15 or 751ML50/0.SD15 for a single dummy.