FOR PRODUCTS SHOWN ON PAGES 30-33.

Prodigy Latchsets Product Data

Knob & Lever Latchsets

- 2⅜" (standard) and 2¾" backsets available.
- Supplied for both 1⅜" and 1¾" door thickness as standard. The minimum door thickness is 1¼" and the maximum door thickness is 2½" (please specify).
- All lever latchsets meet ADA accessibility requirements.
- Each set consists of solid brass knobs or levers, thru-bolted rose mechanisms, finished rose covers, latch, strike, faceplate, spindle, all necessary mounting screws, installation template and instructions.

Tubular Latch Features


- 55° rotation to retract latch. (For knobs)
- 28° rotation to retract latch. (For levers)


- Tough, non-rusting materials used throughout. Face covers and strikes are solid brass. No.014 "Full Lip" strike supplied as standard or No. 013 "T" strike as an option. (Specify.)
- For over sixty years, OMNIA's latches have been opening and closing millions of doors all around the world.


Functions


- **PA – Passage:** Latch operates by knob or lever from either side of door.
- **PR – Privacy:** Push pin provided for privacy inside room. Emergency release hole for outside room. Emergency release key also provided.
- **SD – Single Dummy:** Trim on one side of door only. Surface mounted. Knob or lever with rose. For pair dummy, order two single dummies.


All OMNIA lever latchsets meet ADA accessibility requirements.

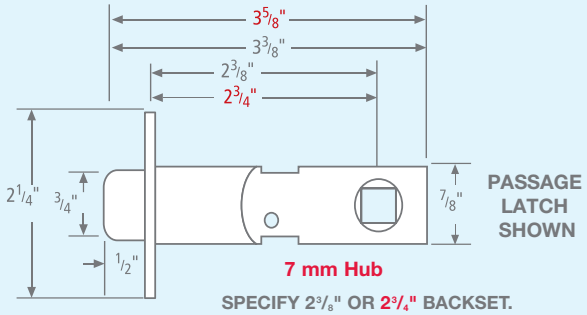










DRAWINGS NOT TO SCALE

Latchset Component List

A – Door Knob/Lever (2)
B – Set Screws (2)
C – Nylon Threaded Washers (2)
D – Finished Rose
E – Metal Spring Assist Sub-Rose
F – Tubular Latch
G – Tubular Latch Faceplate
H – Tubular Latch Strike Plate
I – Metal Spring Assist Sub-Rose
J – Privacy Locking Block Machine Screw (For Privacy ONLY)
K – Privacy Locking Block Locking Stopper (For Privacy ONLY)
L – Privacy Locking Block (For Privacy ONLY)
M – Thru-Bolt Machine Screws with Locking Washer (2)
N – Finished Rose
O – Privacy Locking Pin (For Privacy ONLY)
P – Washer Installation Tool
Q – Emergency Release Key

(55° Latch Parts)
R – Adaptor R
S – Spindle (Teardrop groove positioned towards set screw)
T – Tubular Latch
U – Tubular Latch Faceplate
V – Adaptor V

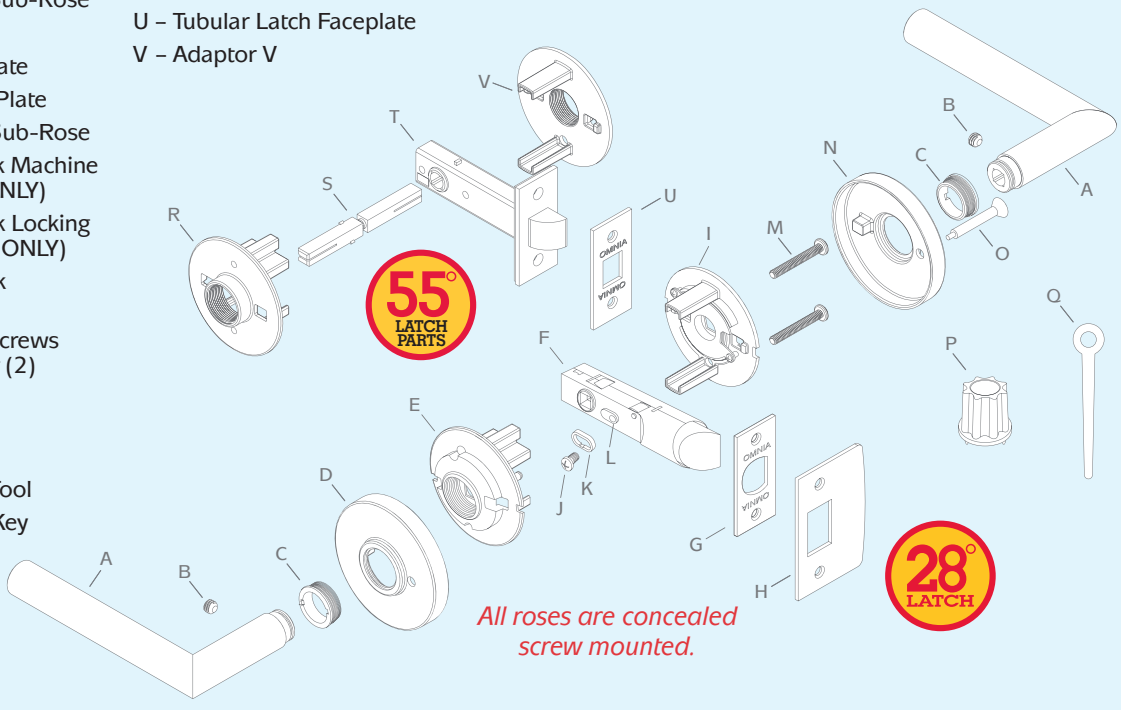


All roses are concealed screw mounted.


Prodigy Latchsets Product Data

FOR PRODUCTS SHOWN ON PAGES 30-33.

FINISH CODES



3 Polished Brass, Lacquered




3A Polished Brass, Unlacquered*



US4 Satin Brass, Lacquered



5 Antique Brass, Lacquered**




10B Black, Oil-Rubbed, Lacquered




14 Polished Nickel Plated, Lacquered




15 Satin Nickel Plated, Lacquered



26 Polished Chrome Plated



26D Satin Chrome Plated***



TB Tuscan Bronze, Lacquered

**3A* Only available for 434, 458, 565 & 955 with Traditional rose.*

***5* Only available for 566, 936, 955 and 956.*

****26D* Only available for 912, 925, 930 & 935 with Modern, Rectangular or Square rose.*

How to Order Prodigy

EXAMPLE: PASSAGE/PRIVACY

All sets shipped standard for 2 3/8" backset and 1 3/8" door thickness and Full Lip strike.

Design	Rose Option		Levers Only*	Latch	Strike		Function	Finish
895	AR	/	X	238	F	.	PA	15
Lever or Knob Item#	*TD = Traditional MD = Modern AR = Arched RT = Rectangular SQ = Square*			*238 = 2 3/8" Backset 234 = 2 3/4" Backset*	*F = Full Lip Strike T = "T" Strike*		*See Function Codes (Page 112)*	*See Finish Codes (Above)*

**Also include an "X" when ordering knobs with a 28° latch.*

Product order number would be 895AR/X238F.PA15 or 895AR/R.SD15 for a single dummy.