

# NOKORI 6331

63" x 31" x 24" (FREESTANDING)

Nokori's sleek and delicate lines inspire peace and calm-offering an authentic invitation to unwind.



## PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BNOLRF00T-XX	BNOLRF00N-XX

THERMOMASSEUR (TMU)	
Hydro-thermo massage • Air jet system	\$
Jets	40
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application <b>BUTOUCH</b>	\$
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy <b>BCHRO6</b>	\$

TUB Soaker	
AromaCloud®	N/A
Illuzio Chromatherapy <b>BCHRO6</b>	\$
WarmTouchShell® <b>BWTS</b>	\$
DOT control (not installed)	Included with therapy

## FEATURES

Installation type	Freestanding		
No. of bathers	2	Imp. gallons	56
US gallons	68	Brass waste kit	Included

## INTEGRATED WASTE & OVERFLOW **BOVERINI-XX**

White <b>01</b> , Chrome <b>07</b> , Brushed Nickel <b>09</b> , Polished Nickel <b>10</b> , Matte White with UltraVelour finish <b>32</b>	Installed & Included
---	----------------------

## STANDARD COLOR

 White <b>01</b>	Included
---	----------

## OPTIONS (UPCHARGE APPLICABLE)

### FINISH

UltraVelour Matte Finish (white only) <b>BVEL2</b>	\$
--	----

### UNIVERSAL ARMRESTS **BGBGU-XX NEW**

White <b>01</b>	\$
-----------------	----

### TILE FLANGE (specify position)

Ordered with bath (not installed) <b>BTILEN</b>	\$
---	----

Factory-installed. Right <b>BTILER</b> , Left <b>BTILEL</b> , Front <b>BTILEF</b> , Back <b>BTILEB</b> , Special installation <b>BTILEO</b>	\$
---	----

### INTEGRATED WASTE & OVERFLOW **BOVERINI-XX**

Matte Black <b>19</b> , Satin Brass <b>18</b>	\$
---	----

### AIR INTAKE\*\* & ISLAND TUB DRAIN™\*\*\*

Air intake & Island Tub Drain™ <b>BAIRISLD</b>	\$
--	----

Island Tub Drain™ <b>BISLDD</b>	\$
---------------------------------	----

Cast Iron Island Tub Drain™ <b>BISLDDCI</b>	\$
---	----

Air intake <b>BAIRINT</b>	\$
---------------------------	----

Air intake installation	\$ net
-------------------------	--------

### IF REQUIRED BY CONSTRUCTION CODE

Brass waste & overflow kit <b>BDRCOB</b>	\$
--	----



Don't forget that this bath is available in **White only**. If turbine is installed under the bath, please follow the installation instructions specified in the **Nokori Installation Manual**.

\* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.

\*\* Air Intake is required if turbine is installed under the bath.


\*\*\* An Island Tub Drain™ is required when there is no access under the bath.

TOTAL PRICE \$

## FOR THE INSTALLER

SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)




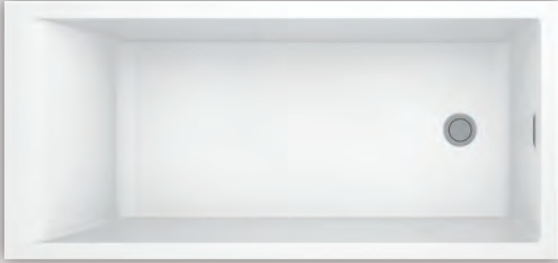

**NOKORI 6331 (FREESTANDING)**



**INSTALLATION**

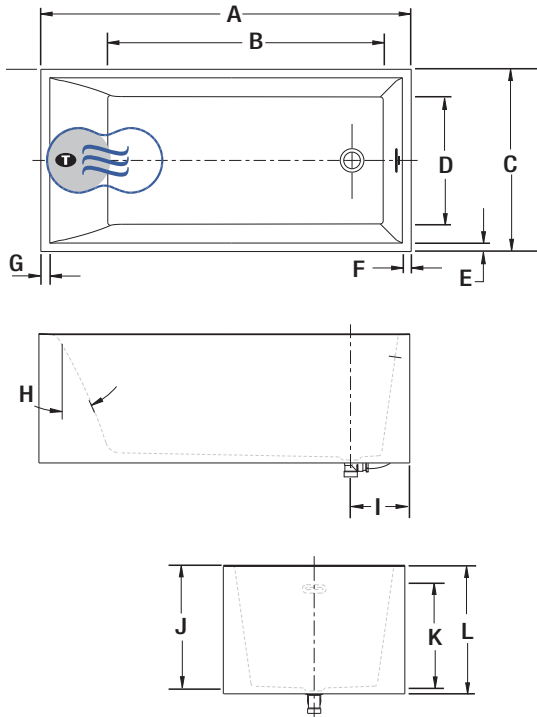

LETTER	DESCRIPTION	MEASURE
A	Total length	63"
B	Bathing well length	47 1/4"
C	Total width	31"
D	Bathing well width	22 1/4"
E	Deck width	1 7/8"
F	Deck width at drain end	2"
G	Deck width at backrest	1 1/2"
H	Slope of backrest	24°
I	Outside edge to center of drain	10"
J	Height from drain to top of deck	20 7/8"
K	Maximum water level	17"
L	Total height	24"

- Turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

**TECHNICAL SPECIFICATIONS**

<b>Hot water supply required</b>	The hot water supply should be 70% or more of the bath's total water capacity.
<b>Turbine</b>	Access to the pump must be at least 18" x 22". <b>Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI.</b> Air vent necessary: 8 sq. in. minimum.
<b>Others</b>	<ul style="list-style-type: none"> <li>- The Geysair is located on the same side as the heated backrest. It must <b>NOT</b> be relocated. It must be <b>connected to the hot water supply</b> and be accessible (provide access).</li> <li>- Faucet must be freestanding or wall-mounted.</li> <li>- Controls cannot be installed on the bath.</li> <li>- The turbine should be <b>remotely installed</b>.</li> <li>- The turbine can also be installed under the bath. <b>Please refer to the Nokori Installation Instructions.</b></li> </ul>

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

<b>Approx. shipping weight</b>	260 lbs
<b>Turbine power</b>	550 W
<b>Air heater</b>	600 W
<b>WARRANTY</b>	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.