

# MTI Solutions Collection Shower Bases

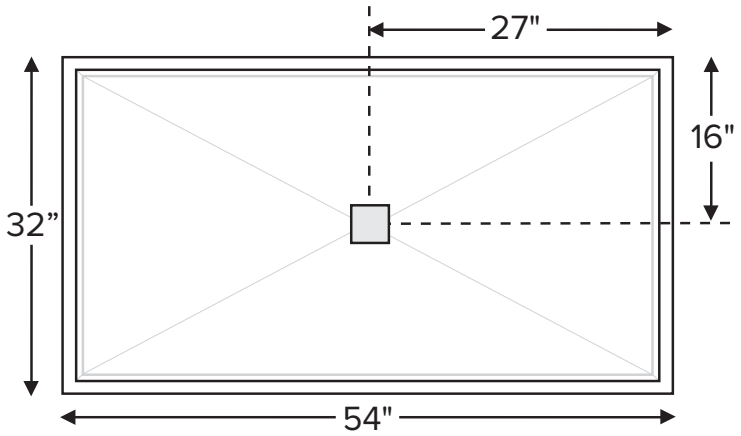

## 5432MT

| 54" x 32" x 3" (exterior bottom of base) | |
|---|---|
| MULTIPLE, LOW-PROFILE THRESHOLD smooth floor | |
| Center Drain | |
| **Acrylic CXL®** | **DoloMatte®** |
| 135 lbs / 61 kg | 152 lbs / 69 kg |




When ordering, please specify tile flange locations.

| Model # | Material | Color / Finish | |
|---|---|---|---|
| SB5432MT | Acrylic CXL® | White (CWH) or Biscuit (CBS) / Gloss | |
| SBDM5432MT | DoloMatte® | White (CWH) / Matte | |

Must specify color code on order. DoloMatte available in white only. Not for use in steam shower applications.

### Options *Must be ordered at time of purchase*

**Quick Ship** (QSPRI)
Reduces lead time. Please call for availability.

**Radiance®** (RAD100) Shower floor heating system.
Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

**Pre-Leveled Foam Base** (PLFSB)

**PVC Drain Kit Finishes** Chrome included with shower base
Brushed Nickel upcharge (SBSQDBN)



Factory-installed tile flange is 1/16" thick.

Account for this thickness when planning final opening size.

### Accessories

**Drain Kit**
Solid Brass Drain Kit with Stainless Steel Trim (SBSQDSB)

**Teak Shower Seat**
Premium
Natural Stainless (TK-SSEAT2416BNS)
High-Polished Stainless (TK-SSEAT2416BHP)
Standard
Natural Stainless (TK-SSEAT2215NS)
High-Polished Stainless (TK-SSEAT2215HP)

**Teak Bath Mat** (TKMAT3018) Measures 30" x 17.5" x 1"
Custom sizes also available. Contact MTI for details.

**Teak Shower Tray** (TK5432MT) **Contact MTI for pricing**

### IMPORTANT ORDERING & INSTALLATION INFORMATION

- Factory-installed tile flange on 1, 2 or 3 sides to facilitate installation. Must specify tile flange location(s) on order.
- 3.5" drain opening pre-drilled.
- Dimensions provided represent the length and width of the bottom of the base without tile flange. See Installation Instructions.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Leveled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.
- All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- Options and accessories may be packaged inside the box. Always check packaging before discarding.
- All product measurements are ±1/2".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
**800-783-8827** or service@mtibaths.com

CSA # MTSB-5432MT
HIRL # MTSB-DM5432MT

©2026 by MTI Baths, Inc. Modification Rights Reserved

Rev. 06 08 2026