
MTI Solutions Collection Shower Bases

6032IFM



Shown with color matched
SculptureStone® drain cover

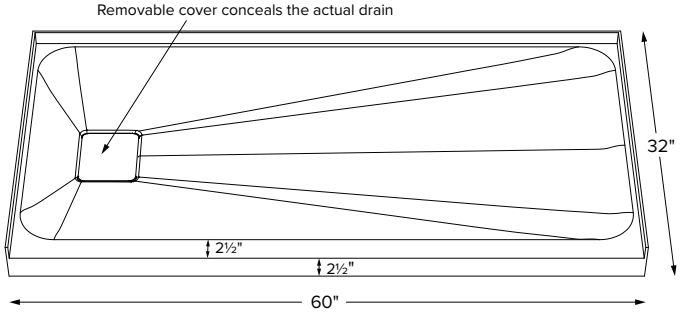


When ordering, please specify
left- or right-hand drain.




Optional stainless steel hidden drain cover shown above

60" x 32" x 2.5"
SINGLE THRESHOLD smooth floor
End Drain
DoloMatte® 80 lbs / 36 kg



Hidden drain cover is
removable for access.



Features softened
edges and corners

Model #	Material	Color / Finish	Package Content	
SBDM6032IFM	DoloMatte®	White (CWH) / Matte	Matching SculptureStone Hidden Drain Cover, PVC drain kit in chrome finish	

Available in white only. Not for use in steam shower applications.

Options *Must be ordered at time of purchase*

Quick Ship (QSPRI)
Reduces lead time. Please call for availability.

Radiance® (RAD100) Shower floor heating system.
Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

Hidden Drain Cover Options Substitute included Hidden Drain Cover with any of the following available options:
Natural Stainless Steel Hidden Drain Cover (DCH6S)
Must specify part code on order; comes in lieu of standard cover.

PVC Drain Kit Finishes Chrome included with shower base
Brushed Nickel upcharge (SBDKBN)

Accessories

Drain Kit
Solid Brass Drain Kit with Stainless Steel Trim (SBDKSB)

Teak Shower Seat
Premium
Natural Stainless (TK-SSEAT2416BNS)
High-Polished Stainless (TK-SSEAT2416BHP)
Standard
Natural Stainless (TK-SSEAT2215NS)
High-Polished Stainless (TK-SSEAT2215HP)

Teak Bath Mat (TKMAT3018) Measures 30" x 17.5" x 1"
Custom sizes also available. Contact MTI for details.

IMPORTANT ORDERING & INSTALLATION INFORMATION

- 3-sided integral tile flange to facilitate installation. Must specify drain hand on order.
- Single threshold design.
- 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact MTI for ordering details for drain kits sold seprately.
- Add proper wet-bedding compound to fully support bottom of shower base. See installation instructions.
- All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- Options and accessories may be packaged inside the box. Always check packaging before discarding.
- All product measurements are ±1/2".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

CSA # MTSB-6032IFM
HIRL # MTSB-DM6032IFM

©2025 by MTI Baths, Inc. Modification Rights Reserved

Rev. 01 06 2025