NEWPORT BRASS

# EAST SQUARE

## TUB AND HAND SHOWER SET

# 1400-4261


## Features

- Solid brass construction
- Euro-motion ceramic disc 40 mm valve cartridge
- 9.25 gallons (35 liters) per minute spout maximum flow rate
- 3/4" braided hot and cold supply lines (with 3/4" to 1/2" adapters)
- 36.53" (92.7 cm) tub spout height at outlet
- 10.06" (25.5 cm) tub spout reach (center-center)
- Contemporary handshower design of resin construction
- ADA Compliant (Handles Only)
- 1.8 GPM (6.8 LPM) Max, Handshower Only



## Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA & ICC/ANSI A117.1 (Handle Only)
- Energy Policy Act of 1992
- EPA WaterSense
- California Energy Commission
- ASME A112.18.3 (Back Flow) Double check valves at hand shower inlet
- All applicable US Federal and State material regulations

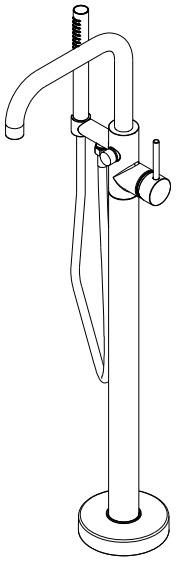

## OPTIONAL ACCESSORY


| System Element | Rough valve | Tempering valve |
|---|---|---|
| **Description** | Freestanding Tub Fill Rough Kit (Floor Mount) | Thermostatic mixing valve (temperature regulator) |
| **Inlet/Outlet Size** | 3/4" NPT and 1/2" direct sweat inlets / 3/4'' NPSM outlets | 1/2'' direct sweat connections |
| **Part Number** | 1-339 | 1-535 |
| **Image** |  |  |



t: 949.417.5207 | www.newportbrass.com

## **PRODUCT DIMENSIONS** *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

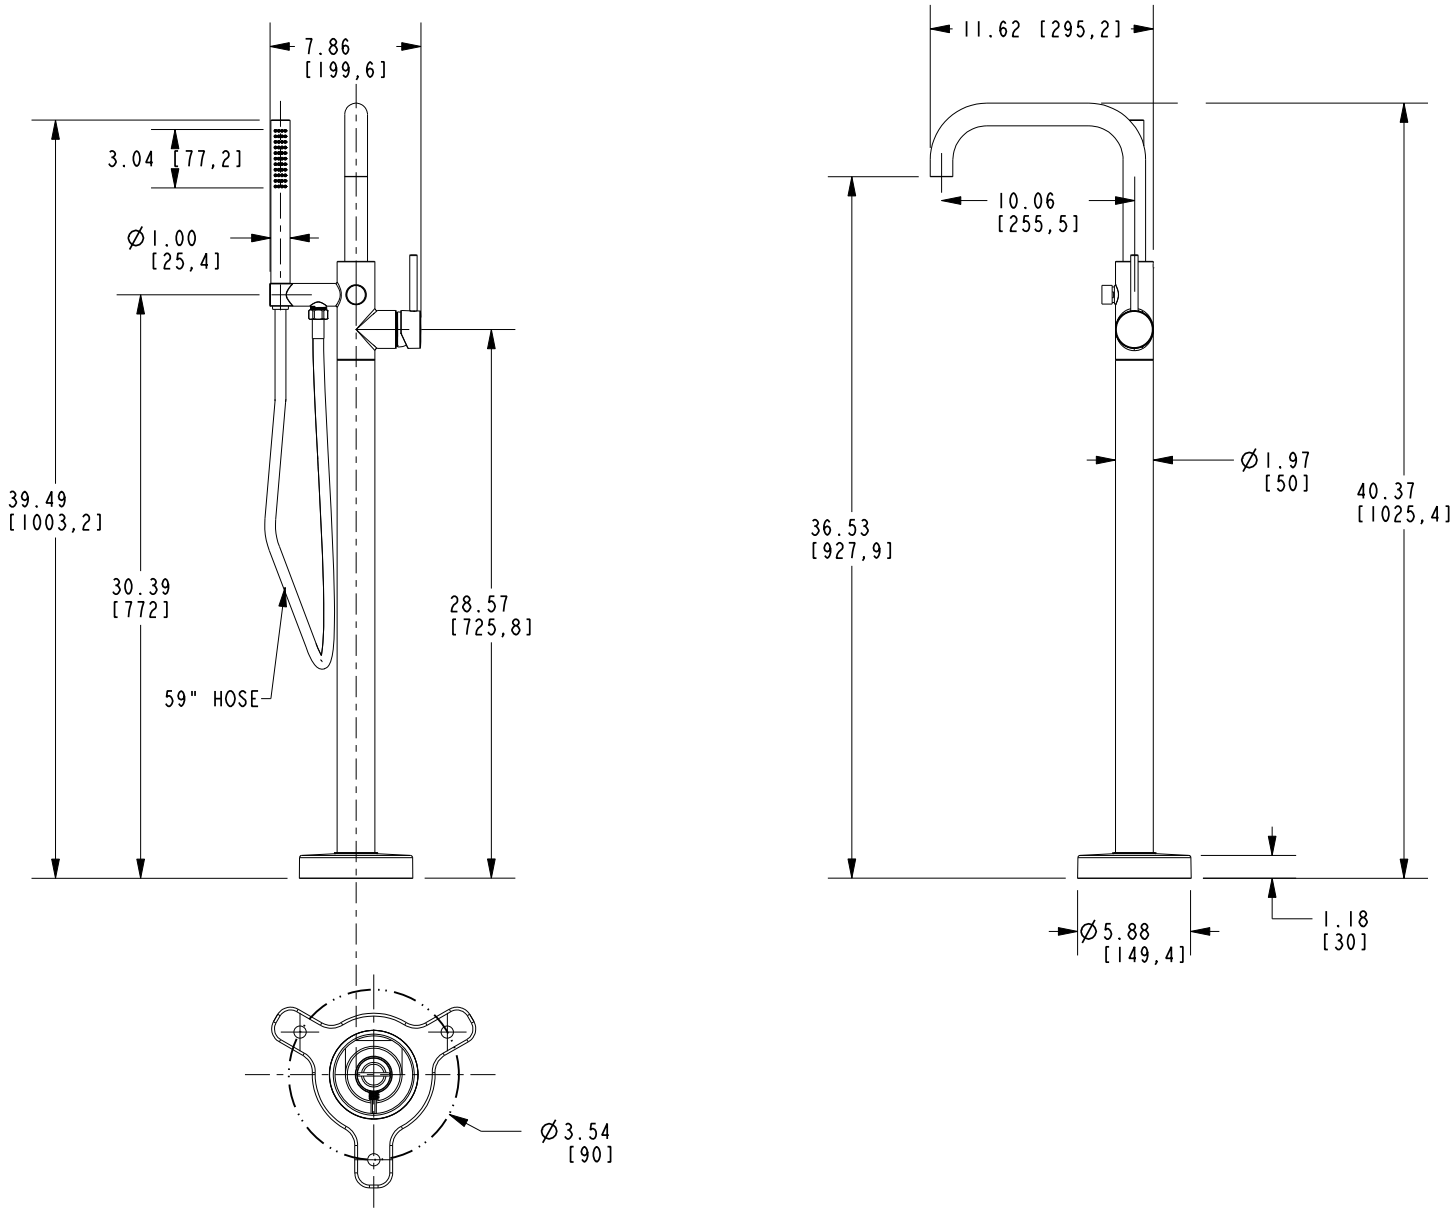


TUB AND HAND SHOWER SET

1400-4261



Newport Brass reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book or www.newportbrass.com for finish options and product availability.