



MODEL 191		
66.5" x 35.5" x 23.5"		
Optional pedestal: 50" x 35.25" x 3"		
FREESTANDING		
81 gal to overflow		
Acrylic CXL®		DoloMatte®
121 lbs / 55 kg	<SOAKER>	136 lbs / 62 kg
Filling this tub to the maximum may require an above average size or dedicated water heater.		

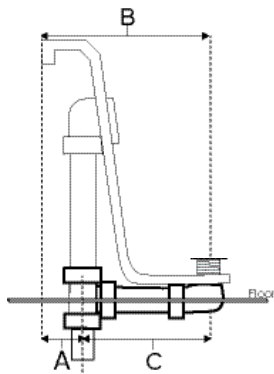

A	B	C
$6\frac{3}{4}$ "	12"	$5\frac{1}{4}$ "

Shown with Air Massage Package.

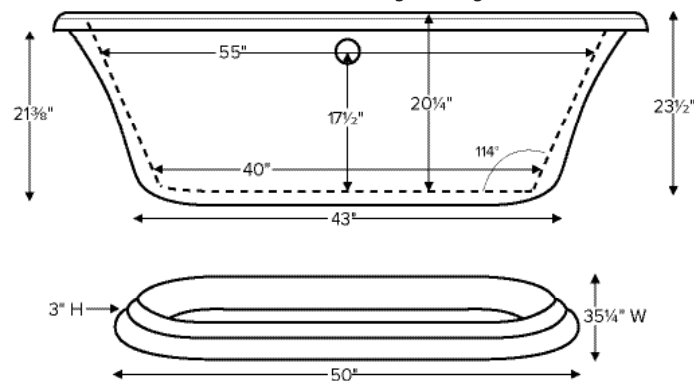

Access panel
15 $\frac{1}{8}$ " x 15 $\frac{1}{8}$ "



Hydrotherapy Package	Components Included	110V GFCI
Air Massage	heated blower	1-15 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp
<p>Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7</p>		

- Before ordering or installing, please consider future access to equipment.
- This tub comes equipped with an access panel to facilitate installation of valves and the waste and overflow.
- Optional pedestal ring does not increase the height of the tub.
- Air baths require job site preparations for remote mounting the blower.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- MTI will eliminate the access panel upon request. Installation will be more difficult.
- Radiance placed on floor locations will affect placement of air jets.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- mti
- ^o
-
- BATHS