


## Adel 1



Features a 1" tub ledge with integrated overflow for minimalist design.



|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| MODEL 250                                                                                    |                          |
| 57.25" x 31" x 21.50"                                                                        |                          |
| FREESTANDING<br>72 gal to overflow                                                           |                          |
| Acrylic CXL®                                                                                 | DoloMatte®               |
| 120 lbs / 54 kg                                                                              | <SOAKER> 135 lbs / 61 kg |
| Filling this tub to the maximum may require an above average size or dedicated water heater. |                          |

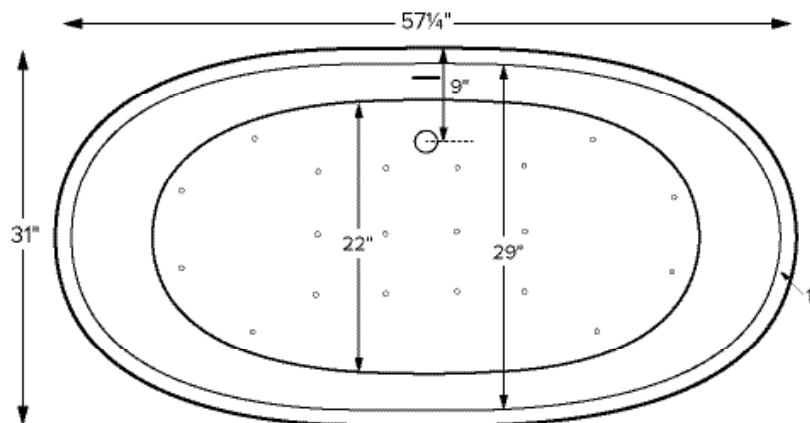

Requires use of a wall-mounted or freestanding tub filler.  
Shown with Air Massage Package.

Drain Rough-In  
Measurement

|    |
|----|
| X  |
| 9" |

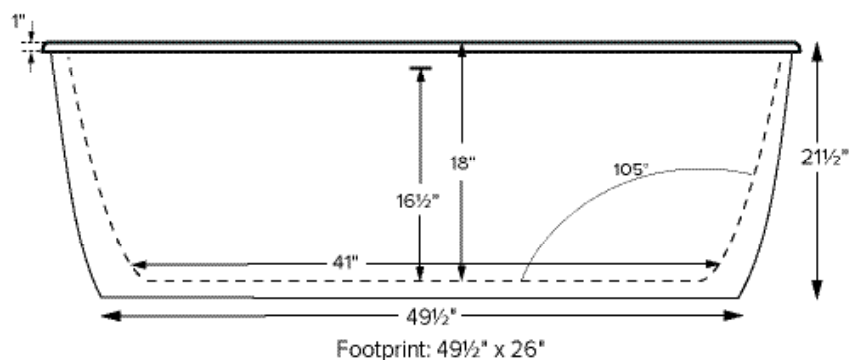

Footprint: 49 1/2" x 26"

## ELECTRICAL COMPONENTS &amp; SPECIFICATIONS

| Hydrotherapy Package                                                                                                                                                                                              | Components Included          | 110V GFCI |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------|
| Air Massage                                                                                                                                                                                                       | heated blower                | 1-15 amp  |
| Air Massage Elite                                                                                                                                                                                                 | heated blower, chromatherapy | 1-15 amp  |
| Electrical requirements may change with the addition of optional therapy components.<br>See specific option details or installation information.<br>CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7 |                              |           |

See the Installation & Operation Manual for more details.  
MTI's Customer Service: Monday-Friday 8am-6pm EST  
800-783-8827 or service@mtibaths.com

## IMPORTANT ORDERING &amp; INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- No access panel. Tub features slotted integrated overflow with toe tap drain.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- Before discarding tub packaging, check for accessories that may be packaged inside.
- All product measurements are  $\pm 1/2"$ .
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

CSA # MTDS- 250  
CSA # MTDS- 250DM

©2026 by MTI Baths, Inc. Modification Rights Reserved