MTI Solutions Collection Foot Spa

Foot Spa 3

MODEL # MTLS-130JP


25.25" x 18.5" x 12.5" / 8.75" deep




ELECTRICAL SPECIFICATIONS

Package	Components Included	GFCI / 110V
Whirlpool	1-bhp pump	1-15 amp
Microbubbles	Microbubbles pump	1-15 amp
See specific option details or installation information. CSA Certified C/US; ASTM D2565 and Z124.1.6 1997		

Packages	Description	Color	Part #	
Soaker	Soaking unit - no jets, • Valves are not inlcuded	**White**	**MTLS-130JPSW**	
		Biscuit	**MTLS-130JPSB**	
Microbubbles (cannot be combined with whirlpool)	1 microbubbles infusion port, pump and on/off device. • Valves are not included	**White**	**MTLS-130JPMW**	
		Biscuit	**MTLS-130JPMB**	
Whirlpool (without cleaning system)	4 multi-directional massage jets, 1-bhp pump, 1 suction fitting, on/off device, and silent air volume control. • Valves are not included	**White**	**MTLS-130JPW**	
		Biscuit	**MTLS-130JPB**	
Whirlpool with Cleaning System (cannot be combined with Virtual Spout high flow filler option)	4 multi-directional massage jets, 1-bhp pump, 1 suction fitting, on/off device, and silent air volume control. • Unit will fill through the jets. No faucet valve required. • Hot/cold valves not included. • Acme in-wall atmospheric vent and Wilkins Dual check valve for backflow prevention[1].	**White**	**MTLS-130JPCLW**	
		Biscuit	**MTLS-130JPCLB**	
Whirlpool with Cleaning System & Valves (cannot be combined with Virtual Spout high flow filler option)	4 multi-directional massage jets, 1-bhp pump, 1 suction fitting, on/off device, and silent air volume control. Single-lever hot/cold valve in chrome finish. • Unit will fill through the jets. No faucet valve required. • Single lever hot/cold valves included. • Acme in-wall atmospheric vent and Wilkins Dual check valve for backflow prevention[1].	**White**	**MTLS-130JPCLVW**	
		Biscuit	**MTLS-130JPCLVB**	

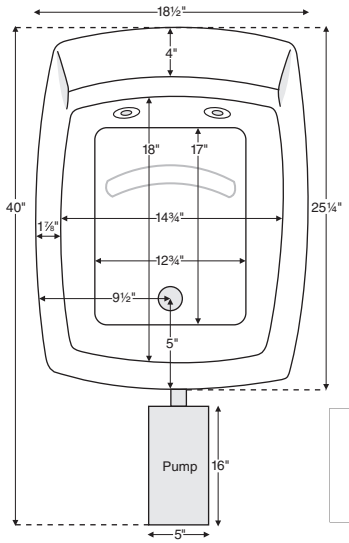

Before ordering or installing, please consider future access to equipment.

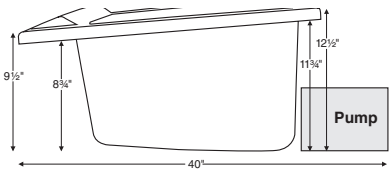

Options
Quick Ship / Priority (QUISINKSH)
Ozonator Sanitation System (OZONE)
Virtual Spout (FPMJ) high flow filler[1] Cannot be combined with cleaning system.

Accessories
Drain Kit-Cable Driven Drain Chrome (JPDKC) Brushed Nickel (JPDKBRN)
Fresh Wave Cleaning Solution Pack of 3 (FFCLBOT) Case of 12 (FFCLCASE)

CONSTRUCTION AND STANDARD FEATURES

- Durable cast Acrylic CXL ® shell is extremely scratch- and stain-resistant
- Non-porous, highly renewable surface.
- Ergonomically designed with sloped floor, calf recesses and integral raised stretch bar for feet.
- 2" drain.
- Limited Residential / Commercial Warranty: 1 year

[1] Check local codes for backflow prevention requirements. ZURN® Wilkins dual check valve-ASSE 1024/CSA B64.6. Cash Acme® vacuum breaker ASSE 1001/CSA B64.1.1. Access and spill pan will be required for proper maintenance of vacuum breaker.

- All product measurements are ±1/2".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.
MTI's Customer Service Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

CSA # MTLS- 130JP

©2025 by MTI Baths, Inc. Modification Rights Reserved

Rev. 12 18 2024