

iWash®
Electronic Bidet Seat, Elongated
S-11

Product Features

- Instant ceramic water heating system - unlimited warm water
- Slim profile, only 5" tall
- Self-cleaning, antimicrobial aluminum nozzle
- Rear and front wash spray
- Oscillating spray
- Power wash function (enema)
- Adjustable water pressure and temperature
- Adjustable nozzle position
- Heated seat with adjustable temperature
- Warm air dryer
- Built-in deodorizer
- In-bowl LED nightlight
- ECO power-saving mode
- Memory for customized settings (2 users)
- Silent close seat and lid cover
- Wall-mount remote control with LED backlit buttons

Quality Assurance


- Factory tested
- ETL certified
- Three year limited product warranty on bidet seat

Accessories Included

- Metal T-valve
- Mounting plate and top-fixation seat bolt set
- Water transfer hose
- Remote control, wall-mount and AAA batteries (x3)



Dimensional Diagram

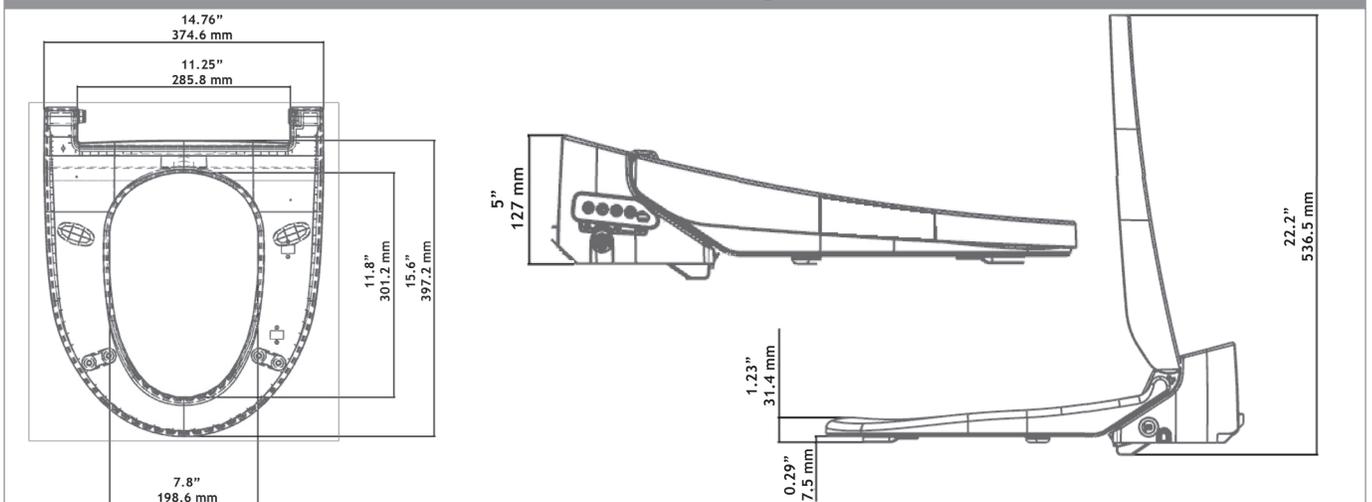

IMPORTANT: iWash® S-11 may not fit certain bowl designs. Dimensions and specifications are subject to change without notice.

Colors



White .01

Item		Specification
Rated Voltage		AC 120V, 50/60Hz
Rated Power Consumption		1300W
Water Supply System		Direct connection with tap water
Waterproof Rating		IPX4
Power Cord Length		1.5M (5ft)
Bidet Spray	Water Heating	Ceramic Heater
	Rear Wash	Maximum 800cc
	Front Wash	Maximum 800cc
	Power Wash	Maximum 800cc
	Water Temperature	86°F (30°C), 97°F (36°C), 100°F (38°C), 104°F (40°C)
	Heater Capacity	1200W
	Safety Device	Thermal cutoff, thermo switch, water level sensor
Heated Seat	Seat Temperature	Ambient, 97°F (36°C), 100°F (38°C), 104°F (40°C)
	Heater Capacity	Maximum 55W
	Safety Device	Thermal cutoff, temperature sensor
Warm Air Dryer	Dryer Temperature	Room temperature - maximum 113°F (45°C)
	Heater Capacity	Maximum 250W
	Safety Device	Thermal cutoff, Bimetal
Deodorization		Automatic deodorizer
Lighting		LED Light
Inlet Water Temperature		41°F - 95°F (5°C - 35°C)
Ambient Temperature		41°F - 95°F (5°C - 35°C)
Country of Origin		Made in Korea
Dimension		20.8" x 15.3" x 5.1" (Elongated)
Net Weight (Gross Weight)		8.3lb (13.2lb)

Compliance Certifications

- Conforms to UL STD 1431
- Certified to CSA STD C22.2 No. 64 & 68
- ETL certified

