


INFINITY 8



66 x 66 x 29 (1675 x 1675 x 735)
inches (mm)



This unit has a 3/4" female waterfall fill spout connection.

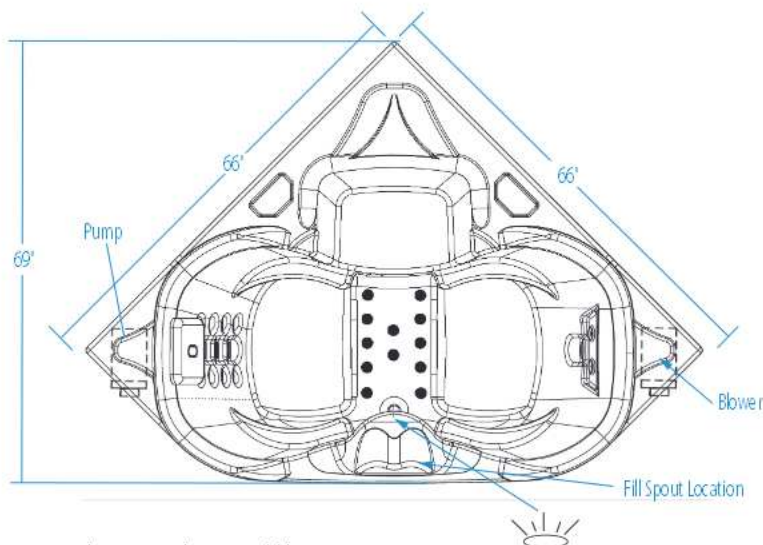

No alternate pump location available.
*Shown with optional air system.

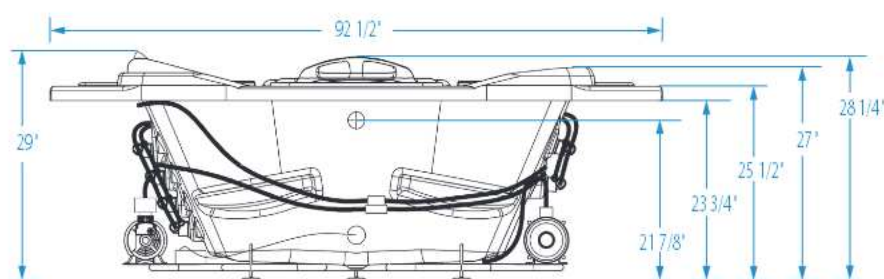

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Whirlpool #A18INF6667	Acrylic	17	2 HP	—	—	1.5 kw Inline	Electronic	Center Front	549 (250)
Air-whirlpool #A18INF6667A	Acrylic	17	2 HP	Injector	Variable speed	1.5 kw Inline	Electronic	Center Front	569 (260)

DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
66 (1675)	34 1/2 (875)	31 1/2 (800)	—

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
95 (360)	76 (285)	65 1/2 (1665)	44 (1120)	32 (810)	24 (610)

PLUMBING DIMENSIONS inches (mm)

A	B
7 (180)	14 1/2 (370)

ELECTRICAL DATA

Component	Specification	Requirement
Pump	2 HP; 12 AMP; 110 V	15 AMP 2 pole, separate circuit, Class A GFCI
Inline Heater	1.5 kW; 12.5 AMP; 110 V	
Blower	1 HP; 10.5 AMP; 110 V	15 AMP 1 pole, separate circuit, Class A GFCI

NOTES:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).