META Deck-mounted tub mixer, with hand shower set for deck-mounted tub installation - Chrome

META

27 632 661 Product version from 7/1/2023



- Spout: Round aerated stream
- Water flow rate limited to max. 6.2 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower set with anti-scale technology
- Integrated diverter
- 8-3/4" Projection
- Total height 12-1/2"
- Height to aerator/spout outlet 8-1/2"
- Spout hole diameter 1-3/8"
- Hole diameter single-lever mixer 1-3/8"
- Hole diameter for hand shower set 1-1/4"
- 2-1/8" diameter flange for spout
- Hand shower set with flange Ø 2-3/8"
- Metal shower hose 68-7/8" with anti-twist device


Internal backflow preventer.

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)


Chrome	27 632 661-00
Brushed Platinum	27 632 661-06
Dark Chrome	27 632 661-19
Light Gold (PVD)	27 632 661-26
Brushed Light Gold (PVD)	27 632 661-27
Matte Black	27 632 661-33
Brushed Gold (PVD)	27 632 661-37
Brushed Dark Brass (PVD)	27 632 661-39
Brushed Bronze (PVD)	27 632 661-42
Brushed Dark Bronze (PVD)	27 632 661-43
Brushed Chrome	27 632 661-93
Brushed Dark Platinum	27 632 661-99

META Deck-mounted tub mixer, with hand shower set for deck-mounted tub installation - Chrome

27 632 661 Product version from 7/1/2023

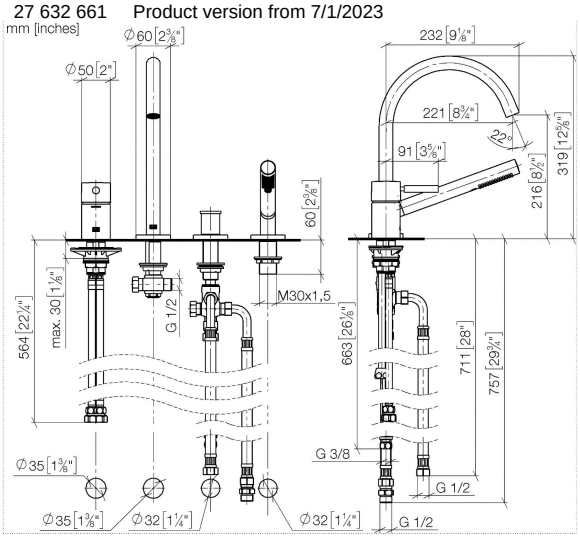

Flow rate chart

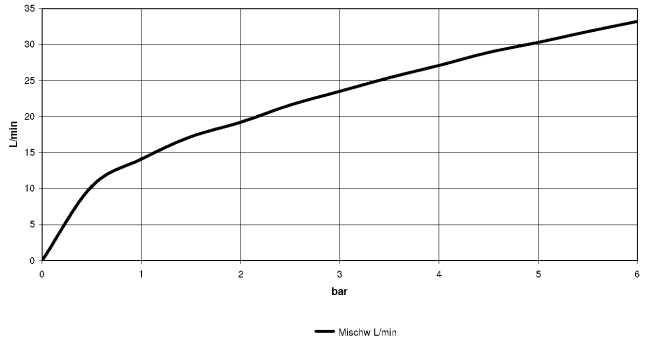

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	DIN 4109
EN 1717	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

META Deck-mounted tub mixer, with hand shower set for deck-mounted tub installation - Chrome

27 632 661 Product version from 7/1/2023

Certificates and sustainability


LGA_38 WRAS_2207 IAPMO_4976 Belgaqua_21-026-2 Belgaqua_25-341-2

EPD-DOR-20230287-IBA1-EN Environmental.product-declarat

META Deck-mounted tub mixer, with hand shower set for deck-mounted tub installation - Chrome

27 632 661 Product version from 7/1/2023

Parts for other finishes can be found here: Brushed Platinum

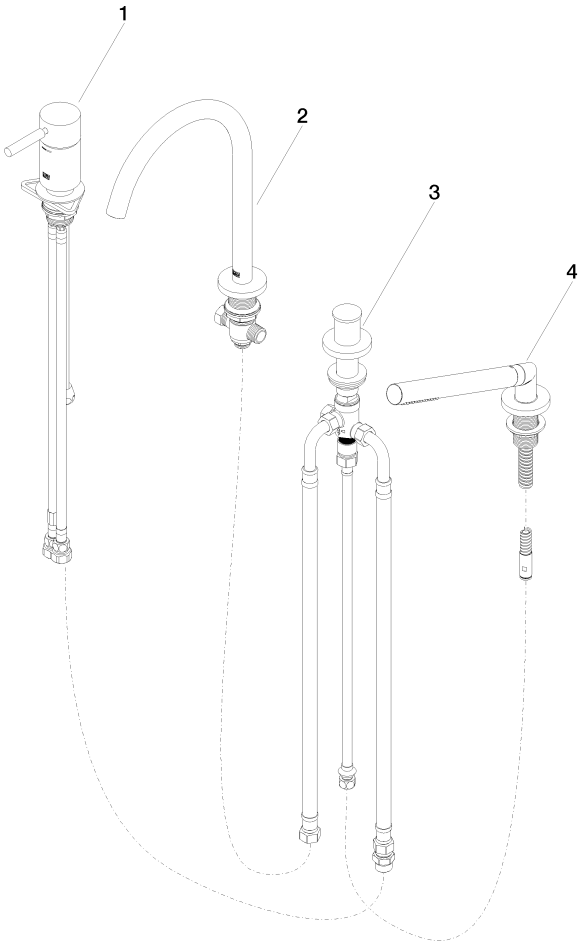

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
4	27 702 660-00	META Hand shower set for deck-mounted tub installation - Chrome	1.00	26
2	13 512 661-00	spout	1.00	82
1	29 300 660-00	META Single-lever tub mixer for deck-mounted tub installation - Chrome	1.00	26
3	29 140 660-00	META Two-way diverter for deck-mounted tub installation - Chrome	1.00	26