




Lunessa

Technical Specifications

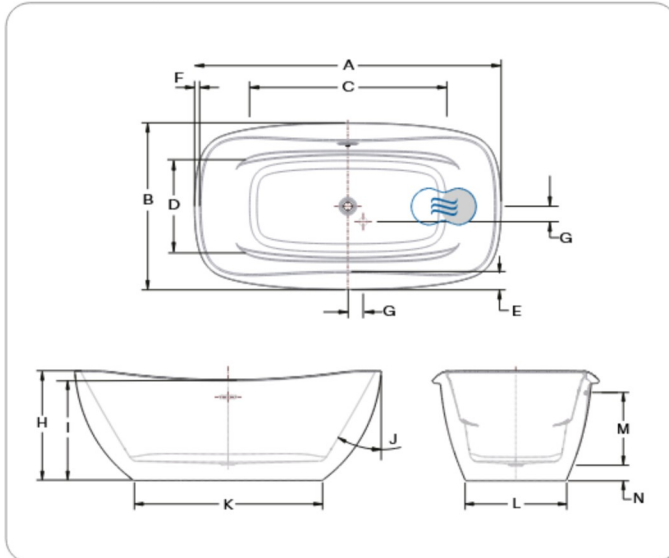

Letter	Description	Measure
A	Total length	70"
B	Total width	38"
C	Bathing well length	47"
D	Bathing well width	21 1/4"
E	Deck width (side)	4 1/8"
F	Deck width (end)	1 1/2"
G	Center drain to air intake	3 1/2"
H	Maximum total height	25"
I	Minimum total height	23"
J	Slope of backrests	30°
K	Base length	43 1/4"
L	Base width	23 1/4"
M	Maximum water level	16 3/8"
	Maximum water level with AromaFlow	14 5/8"
N	Height from drain to floor	3 1/4"

● Indicates heated backrest (TMU) ☉ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000094
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

For the installer
Scan to view
installation video
(3:20 min) →



Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.