

Eros

71" x 71" x 23"


Installation:

Drop-in


cannot be undermounted

Not recommended as a tub / shower combination.

Eros features a textured bottom.

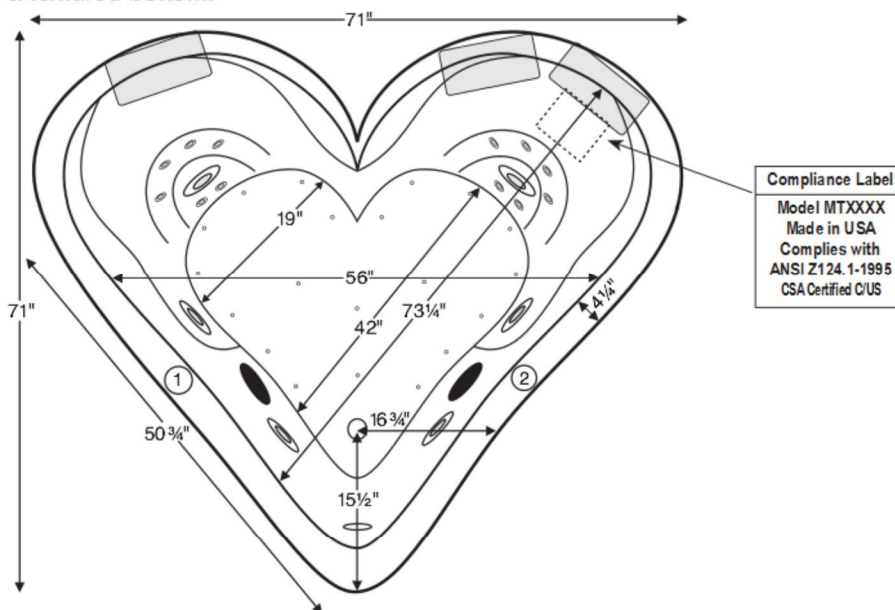

Numbered locations on tub deck are possible Fill-Flush, Hand-Held Shower or Breda locations. Shown with Air Massage and Premium Whirlpool Package.

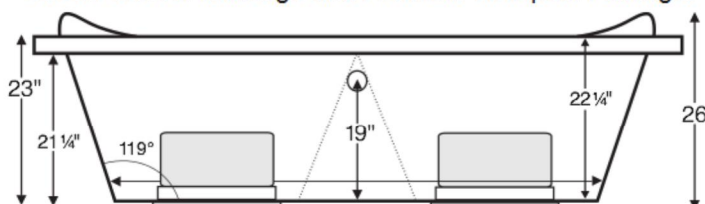

IMPORTANT:
Air baths and tubs with a pre-leveled foam base or frame system add 2-3" to overall tub height.

GENERAL SPECIFICATIONS:

Material	Acrylic
Plumbed Weight	200 lbs / 90.80 kg
Soaker Weight	125 lbs / 56.75 kg
Average Fill	45 gal to above jet level
Maximum Fill	137 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

ELECTRICAL SPECIFICATIONS:

Required Electrical Service	110 Volt
Air Bath or Standard Whirlpool	1-15 amp GFCI
Standard Whirlpool with Air	2-15 amp GFCI
Premium Whirlpool	2-15 amp GFCI
Premium Whirlpool with Air	2-20 amp GFCI

CSA Certified C/US, ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool components.
NOTE: See electrical specifications on page C-30 for electrical requirements of tub options.

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- Add bedding compound to fully level and support bottom of tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor *without* bedding compound, provided the floor is level.
- **Overall tub height is increased by approx. 2-3" when tub is equipped with any air bath package or when pre-leveled foam base or frame system is ordered.**
- Please measure tub **on-site** before building tub decking.
- Suction and control locations may vary.
- Specifications and configurations are subject to change without notice.
- Measurements are $\pm 1/2"$ and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.

See the "Designer Collection Tubs Installation & Operation Manual" included with tub delivery or go to mtibaths.com/support/installation_operation/manuals for all the information necessary to install and operate the tub.

MTI's Customer Service Department is available Monday-Friday 8am-6pm EST at 800-783-8827 or customerservice@mtibaths.com to answer any questions pertaining to ordering or installation.

