

## SORELLE™

### PRODUCT DESCRIPTION

Elevate your space with the Sorelle™ matched pair of lighted vanity mirrors—an elegant duo of organically shaped forms that embody harmony and modern artistry. With their soft curves and radiant edge lighting, these sculptural mirrors create a serene, spa-like ambiance while celebrating the beauty of asymmetry and pairing. A stunning statement of luxury and design balance.

### SPECIFICATION STATEMENT

Solution shall consist of a pair of organic-shaped mirrors using 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass with wall-glow accent lighting around the perimeter, providing uniform light to the walls at all edges of the mirror. The product shall use dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Perimeter wall-glow ambient lighting with diffuser for a finished side view
- Phase/triac dimming technology

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- ADA compliant
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS


- Defogger<sup>1</sup>
- Custom sizes

### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs

<sup>1</sup> May not be compatible with all upgrades and options.

**DIMENSIONAL DRAWING** (Not to scale.)

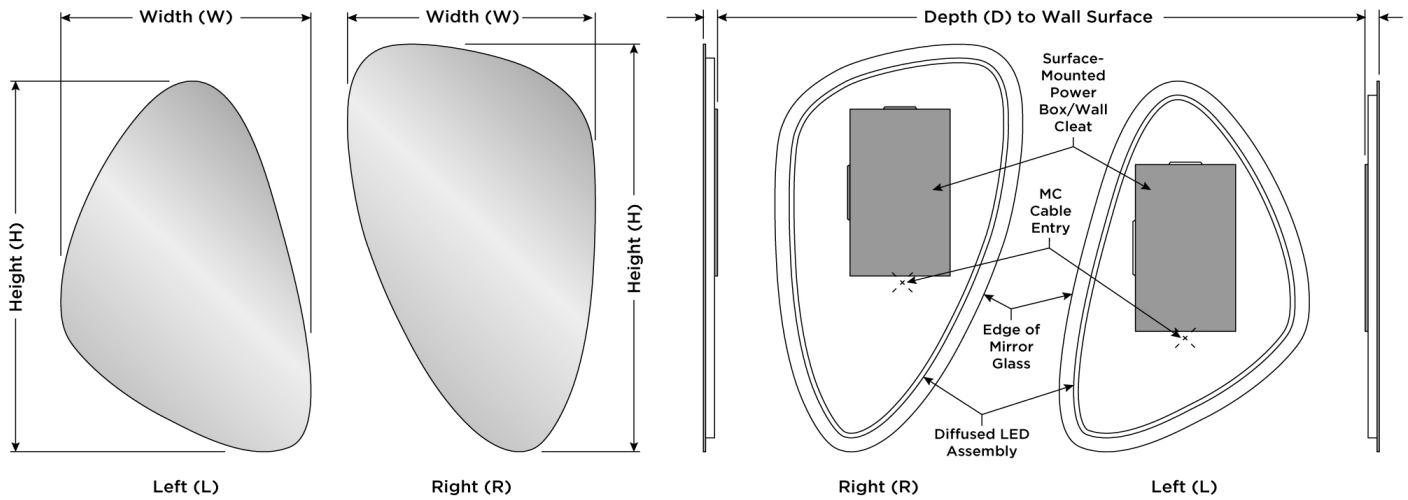

**STANDARD MODELS**

Model Number <sup>1</sup>	Model Type	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
SOR-2640-LT	Left (L)	26" W x 40" H x 1.63" D (660mm W x 1,016mm H x 41mm D)	6,378	120 or 277VAC, 51W
SOR-2644-RT	Right (R)	26" W x 44" H x 1.63" D (660mm W x 1,118mm H x 41mm D)	7,155	120 or 277VAC, 57W


**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120 or 277VAC hardwire electrical connection; direct wire from behind power box or provide whip to reach side knockout; junction box not required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by phase/triac dimming wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are  $\pm 1/8"$  ( $\pm 3$ mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.

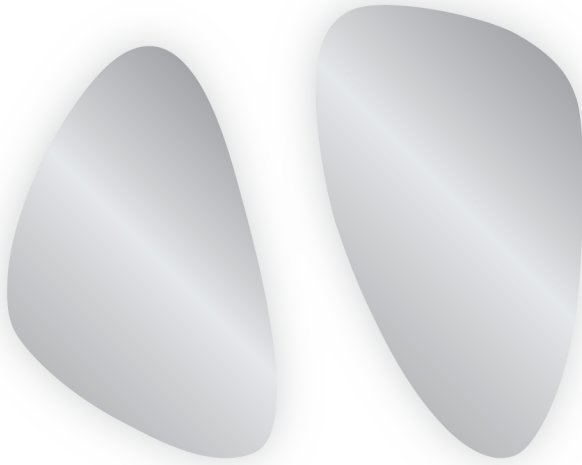

## SORELLE™

### PRODUCT DESCRIPTION

Elevate your space with the Sorelle™ matched pair of lighted vanity mirrors—an elegant duo of organically shaped forms that embody harmony and modern artistry. With their soft curves and radiant edge lighting, these sculptural mirrors create a serene, spa-like ambiance while celebrating the beauty of asymmetry and pairing. A stunning statement of luxury and design balance.

### SPECIFICATION STATEMENT

Solution shall consist of a pair of organic-shaped mirrors using 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass with wall-glow accent lighting around the perimeter, providing uniform light to the walls at all edges of the mirror. The product shall use dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Perimeter wall-glow ambient lighting with diffuser for a finished side view
- Phase/triac dimming technology

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- ADA compliant
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS


- Defogger<sup>1</sup>
- Custom sizes

### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs

<sup>1</sup> May not be compatible with all upgrades and options.

**DIMENSIONAL DRAWING** (Not to scale.)

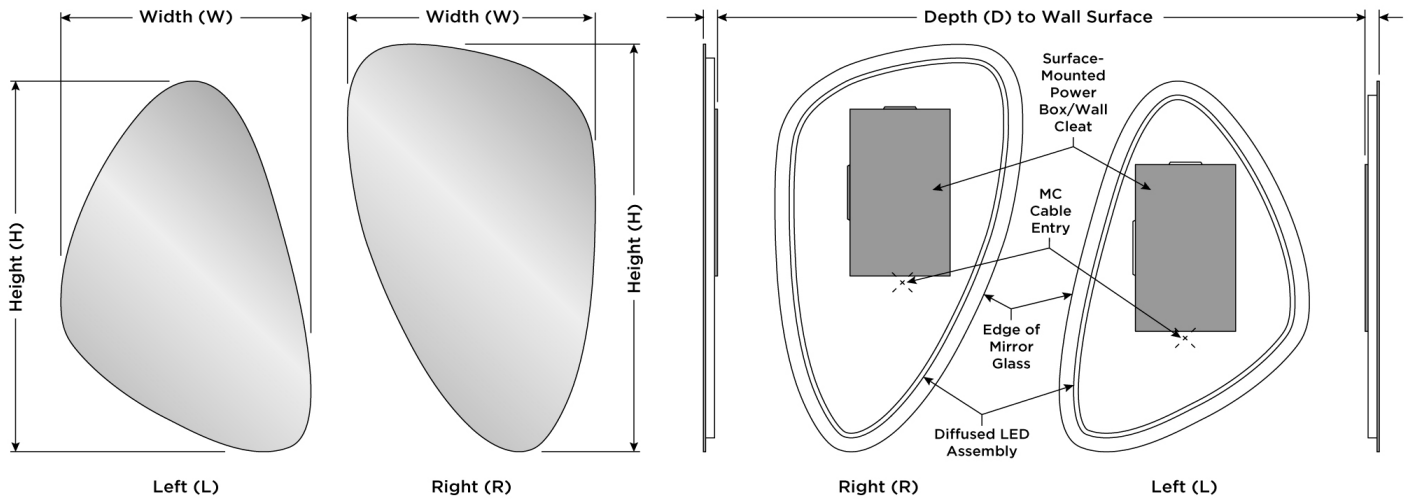

**STANDARD MODELS**

Model Number <sup>1</sup>	Model Type	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
SOR-2640-LT	Left (L)	26" W x 40" H x 1.63" D (660mm W x 1,016mm H x 41mm D)	6,378	120 or 277VAC, 51W
SOR-2644-RT	Right (R)	26" W x 44" H x 1.63" D (660mm W x 1,118mm H x 41mm D)	7,155	120 or 277VAC, 57W

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120 or 277VAC hardwire electrical connection; direct wire from behind power box or provide whip to reach side knockout; junction box not required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by phase/triac dimming wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are  $\pm 1/8"$  ( $\pm 3\text{mm}$ ).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.