



Submitted Model No.: _____

Specific Features: _____

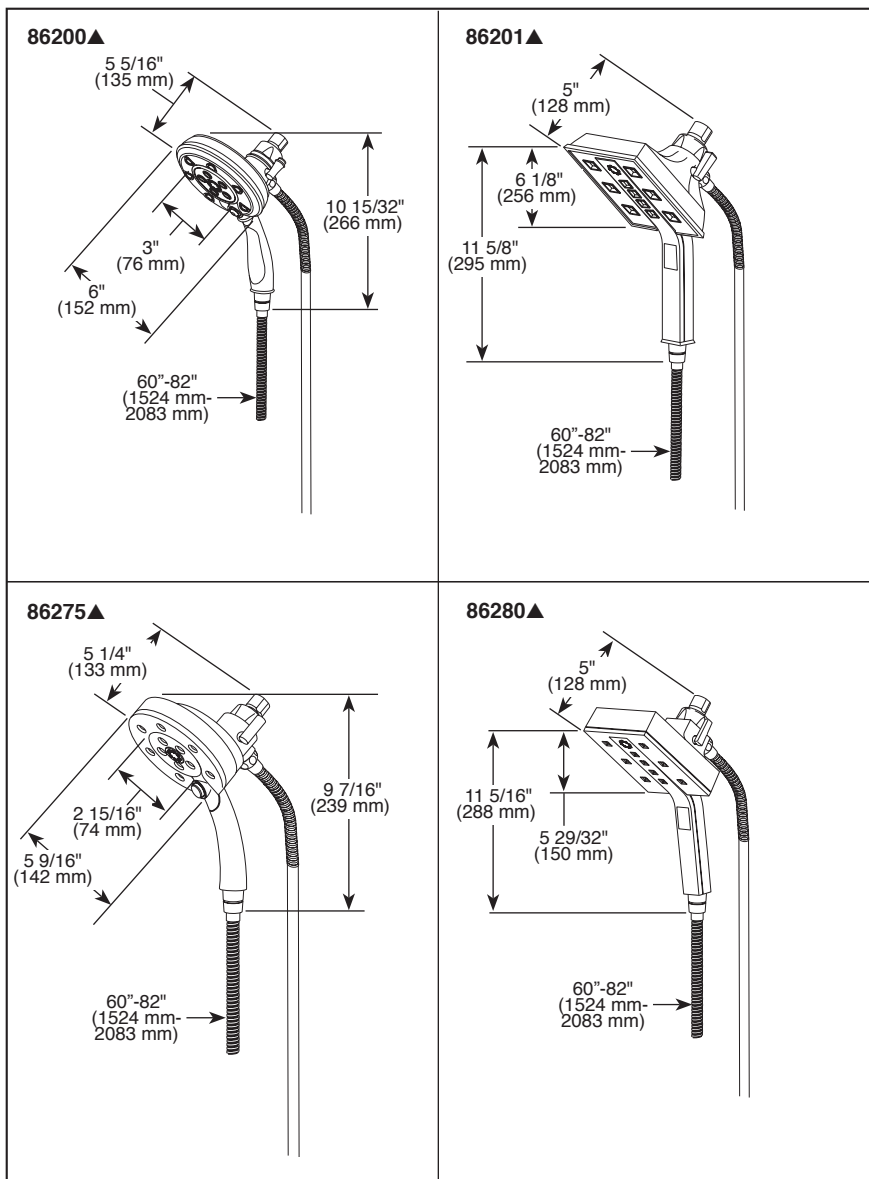

▲ Designate proper finish suffix

Spray Patterns



Massage
Spray



Pause



H₂Okinetic®
Spray



H₂Okinetic®
Spray w/
Massage

BRIZO®

HYDRATI® 2|1 SHOWER

- 2|1 Shower
- Push Button Selection

FEATURES:

- H₂Okinetic® Technology
- MagnaDock® Technology

STANDARD SPECIFICATIONS:

- Maximum 2.5 gpm @ 80 psi, 9.5 L/min) @ 550 kPa
- Showerhead and handshower all in one
- 3-way diverter - showerhead only, handshower only, and combo
- Integrated handshower docks securely into showerhead with MagnaDock® technology
- Four -setting push button handshower
- 60" (1524 mm) stretchable finished metal hose stretches to 82" (2083 mm) for extra reach
- For use with automatic compensating valves rated at 1.5 gpm (5.7 L/min) or less

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ♦
-  Indicates compliance to ICC/ANSI A117.1

- ♦ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.