TOTO®

MW4364726CEMFGN(A)

Aquia IV Cube® WASHLET®+ S7 Two-Piece Toilet - 1.28 GPF / 0.9 GPF



FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S7 and tank set
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Night light
- Auto flush available as upgrade

TORNADO FLUSH **EWATER+**

CEFIONTECT **Auto Flush**

UNIVERSAL HEIGHT

MODELS

- **MW4364726CEMFGNA (#01)**
  With CEFIONTECT ceramic glaze, WASHLET+ S7 with contemporary design and Auto Flush
  - **CT446CEFGNT40**
    Elongated bowl with CEFIONTECT
  - **ST436EMNA**
    Tank and cover only
  - **SW4726AT40**
    WASHLET+ S7
  - **THU855**
    Auto Flush Kit
  - **9AU321-A**
    WASHLET Adaptor
- **MW4364726CEMFGN (#01)**
  Same as MW4364726CEMFGNA without Auto Flush

OPTIONAL COMPONENTS

- **TSU48.10**
  10" Unifit Rough-In
- **TSU48.14**
  14" Unifit Rough-In
- **THU806#MBL-A**
  Trip Lever - Matte Black

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF). Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome trip lever. Toilet shall be TOTO Model MW4364726CEMFGN_#01.

See SW4726AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use with autoflush feature model, or with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements

MW4364726CEMFGN(A)

Aquia IV Cube® WASHLET®+ S7
Two-Piece Toilet - 1.28 GPF / 0.9 GPF


SPECIFICATIONS

Water Use	1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7" x 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT446CEFGNT40: 83 lbs ST436EMNA: 29 lbs SW4726AT40: 14.5 lbs
Shipping Dimensions	CT446CEFGNT40 29-5/8" L x 16-3/8" W x 19-3/4" H ST436EMNA 20-1/2" L x 8-3/4" W x 17-1/2" H SW4726AT40 23-3/8" L x 17-5/8" W x 6-1/4" H

See SW4726AT40 Specification Sheet for details on included WASHLET.


INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

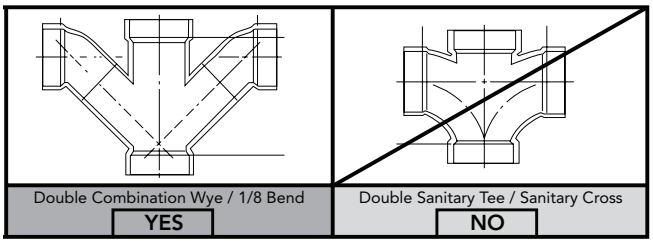

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12″ rough-in distance.

DIMENSIONS

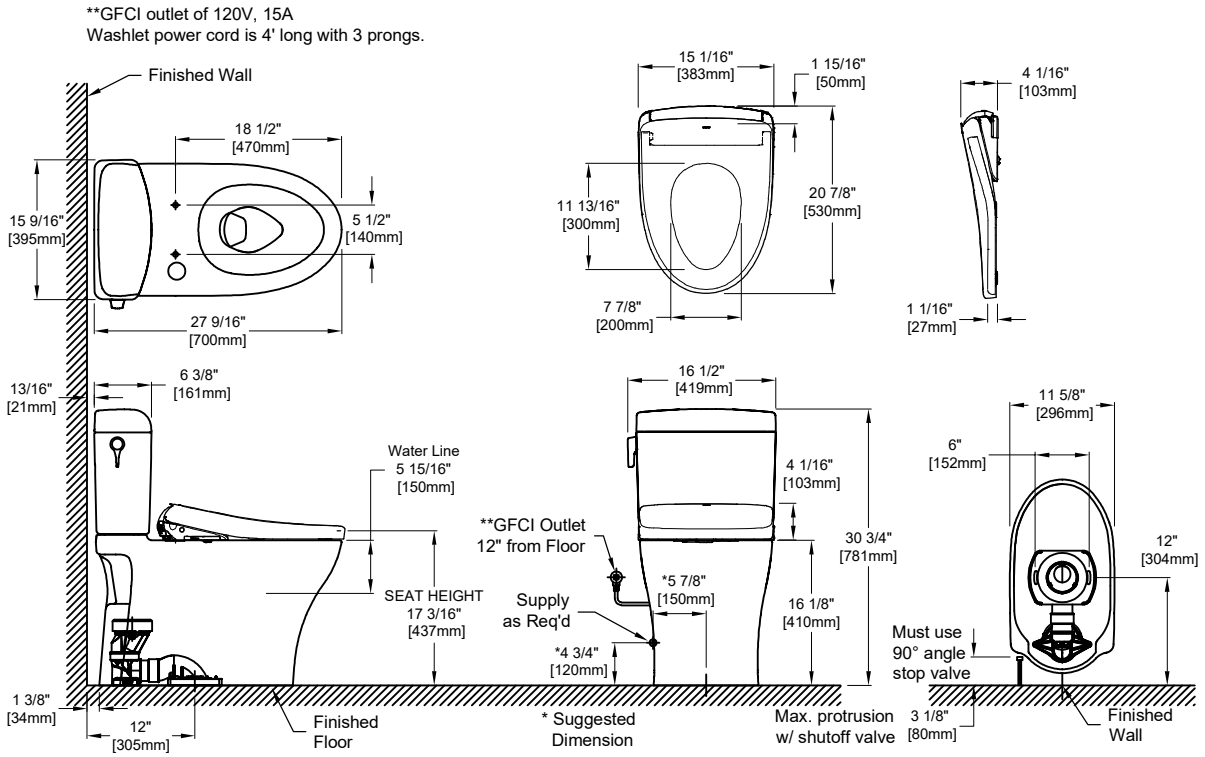

TOTO®

These dimensions and specifications are subject to change without notice