FOR PRODUCTS SHOWN ON PAGES 15-21.

# STAINLESS STEEL & PVD Latchsets Product Data

## Stainless Steel Latchsets

- Will fit 2 1/8" bore.
- 2 3/8" and 2 3/4" backsets available.
- Supplied for 2 3/8" backset and 1 3/8" door thickness unless otherwise specified.
- All lever latchsets meet ADA accessibility requirements.

## Latch Features

- 28° retraction.
- 8 mm hub.
- Adjustable faceplate/armor plate for beveled doors.
- Built-in privacy feature with automatic release by inside lever or depression of latch nose.
- All dimensions are standard to fit existing bores for replacement installations.
- No. 013 "T" strike supplied as a standard or No. 014 "Full Lip" strike as an option at no extra charge. No. 019 4 7/8" ASA strike also available for an additional charge. Specify when ordering.

## Concealed Screw Roses

Self-aligning, spring-assisted roses.

- 2 7/16" dia. x 3/8" proj. Shipped standard.
- 2 7/16" square x 3/8" proj. or 2" dia. x 7/16" proj. optional. (To achieve a privacy function with a 2" dia. rose, a separate mortise privacy bolt must be ordered.)

## Functions

- **PA – Passage:** Latch operates by lever from either side of door. Uses 8 mm solid spindle.
- **PR – Privacy:** Latch operates by lever from either side. Push button on interior rose engages privacy; emergency release hole is on exterior rose. Turning inside lever will release privacy and retract latchbolt. For bathroom or bedroom. Uses 8 mm split spindle.
- **SD – Single Dummy:** Trim on one side of door only. For pair dummy, order two single dummies.

## Passage Latches (8 mm hub)

107LPA38: 2 3/8" backset
Passage lever latch

107LPA34: 2 3/4" backset
Passage lever latch

## Privacy Latches (8 mm hub)

108LPR38: 2 3/8" backset
Privacy lever latch

108LPR34: 2 3/4" backset
Privacy lever latch

***The above part numbers should be used when ordering latches only.***


**All OMNIA lever latchsets meet ADA accessibility requirements.**

## Finish Options


**US32** Polished Stainless Steel
**US32D** Satin Stainless Steel

## Care of Product

OMNIA's Stainless Steel requires minimal attention and will not tarnish or corrode under normal circumstances. However, exposure to certain chemical or environmental conditions may promote surface oxidation. Please be aware that this is not a defect in the stainless steel but a reaction on the surface of the finish to the chemical environment which can be removed with stainless steel polish, or an abrasive pad.

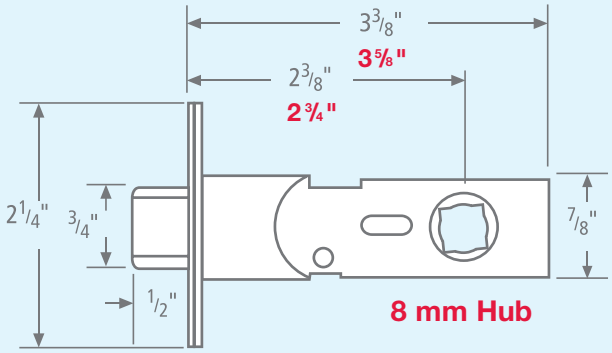


**SPECIFY 2 3/8" OR 2 3/4" BACKSET.**

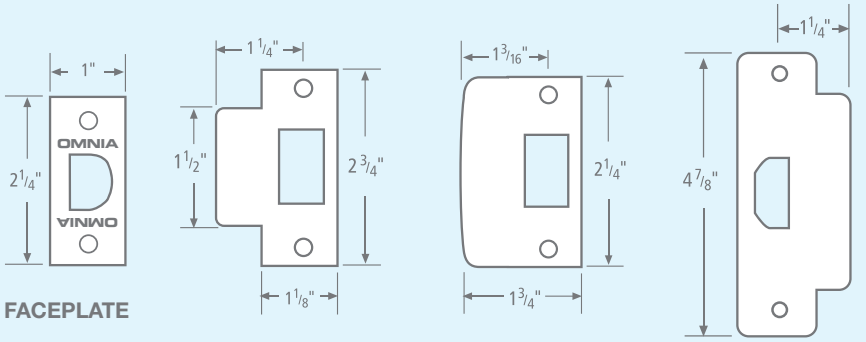


FACEPLATE

NO. 013 "T" STRIKE — STANDARD

NO. 014 "FULL LIP" STRIKE — OPTIONAL

NO. 019 "ASA" STRIKE — OPTIONAL *(Add $25 to latchset price)*


DRAWINGS NOT TO SCALE

FOR PRODUCTS SHOWN ON PAGES 15-21.

# STAINLESS STEEL & PVD Latchsets
# Product Data

## Latchset Component List

A – Door Levers (2)
B – Set Screws (2)
C – Spindle (Teardrop groove positioned towards set screw)
Da – Finished Rose
Db – Nylon Sub-Rose
E – Thru-bolt Screws (2)
F – Privacy Locking Block Machine Screw
G – Privacy Locking Block Locking Stopper
H – Privacy Locking Block
I – Tubular Latch
J – Tubular Latch Faceplate
K – Tubular Latch Strike Plate
L – Tubular Latch Dust Box
Ma – Nylon Sub-Rose
Mb – Finished Rose
N – Privacy Locking Pin

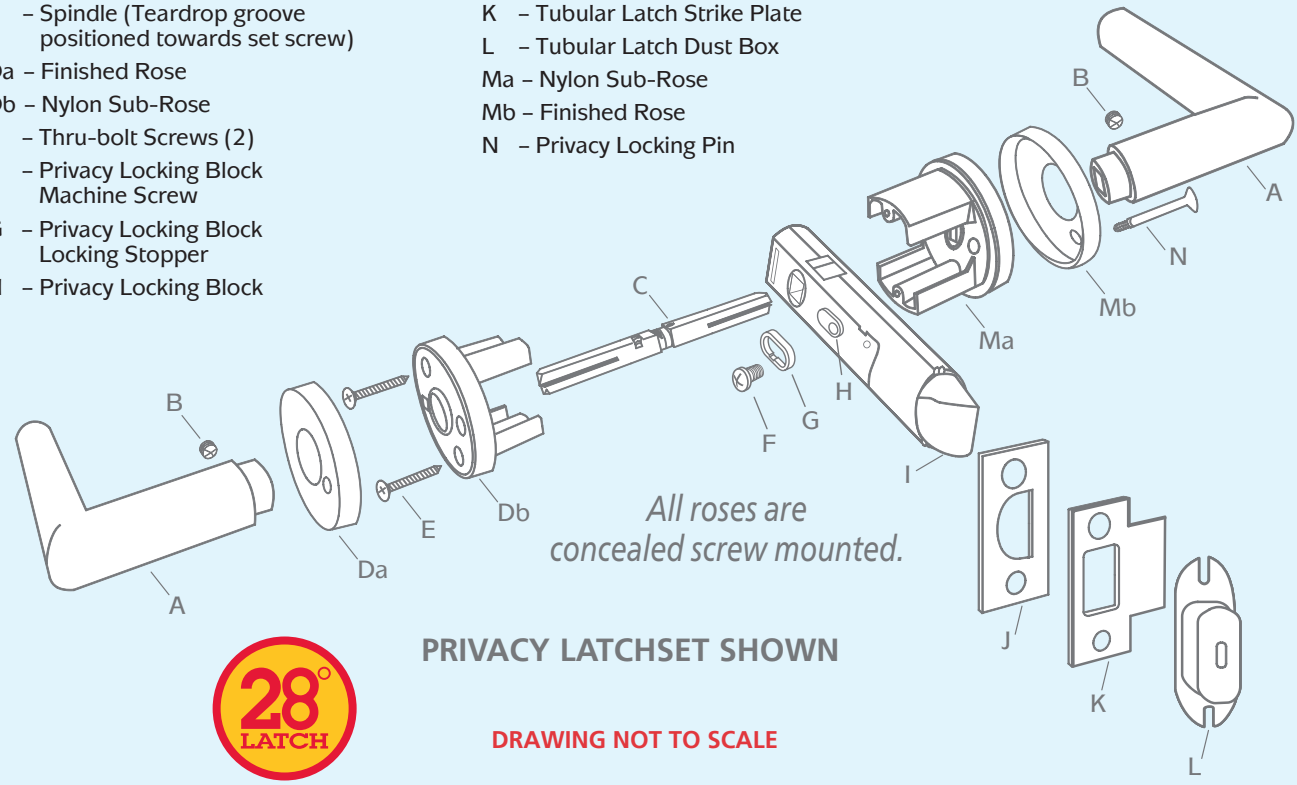



28° LATCH

PRIVACY LATCHSET SHOWN

DRAWING NOT TO SCALE

## FINISH CODES



**32** Polished Stainless Steel



**32D** Satin Stainless Steel

## How to Order Stainless Steel

**EXAMPLE: PASSAGE/PRIVACY**

***All sets shipped standard for 2 3/8" backset and 1 3/8" door thickness and T strike.***

| Design | Rose Option | | Latch | Strike | | Function | Finish |
|---|---|---|---|---|---|---|---|
| 12 | | / | 238 | T | . | PA | 32D |
| *Lever Item #* | *Only for: S = Square M52 = 2" Round* | | *238 = 2 3/8" Backset 234 = 2 3/4" Backset 0 = Single Dummy* | *T = "T" Strike F = Full Lip Strike* | | *See Function Codes (Page 108)* | *See Finish Codes (Above)* |

***Product order number would be 12/238T.PA32D or 12/0.SD32D for a single dummy.***